



Julian Rodemann¹, Thomas Augustin¹

Towards Prior-Mean Robust Bayesian Optimization

Julian Rodemann

Young Statisticians Session (YSS)

DAGStat 2022

March 30, 2022, Hamburg




¹Department of Statistics, LMU Munich




- ① Bayesian Optimization
- ② Gaussian Processes
- ③ Sensitivity Analysis
 - Setup
 - Results
- ④ Prior-Mean-Robust BO (PROBO)
 - Prior near-ignorance models
 - GLCB
- ⑤ Application in Material Science
- ⑥ Discussion
- ⑦ References




- 1 Bayesian Optimization
- 2 Gaussian Processes
- 3 Sensitivity Analysis
- 4 Prior-Mean-Robust BO (PROBO)
- 5 Application in Material Science
- 6 Discussion
- 7 References

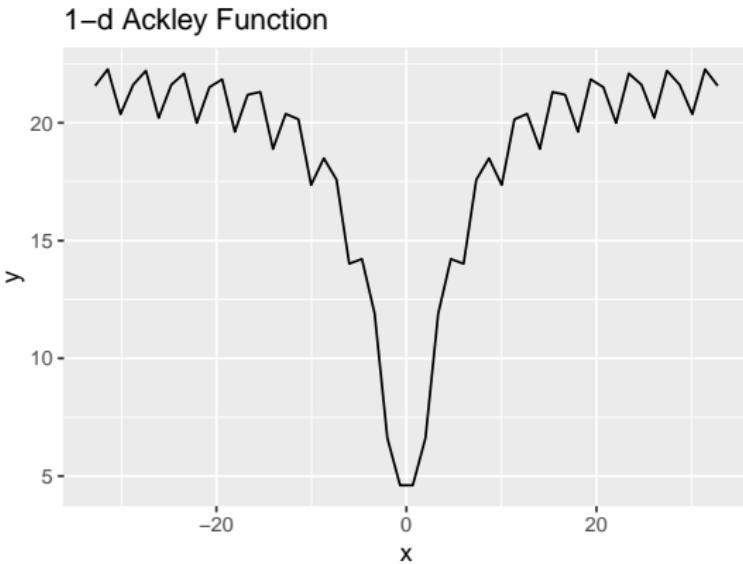


Note: If not otherwise stated, all figures are based on own computations using `ggplot2` [Wickham, 2016], `smoof` [Bossek, 2017] and `mlr3MBO` [Bischl et al., 2017]

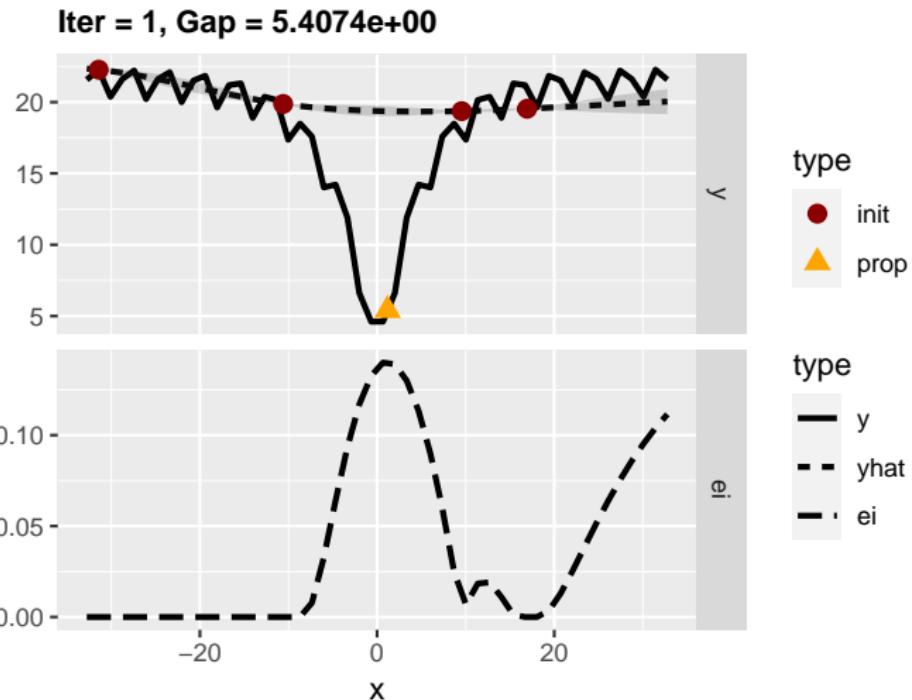


Iteration 1: Surrogate Model (top) and Acquisition Function (bottom)

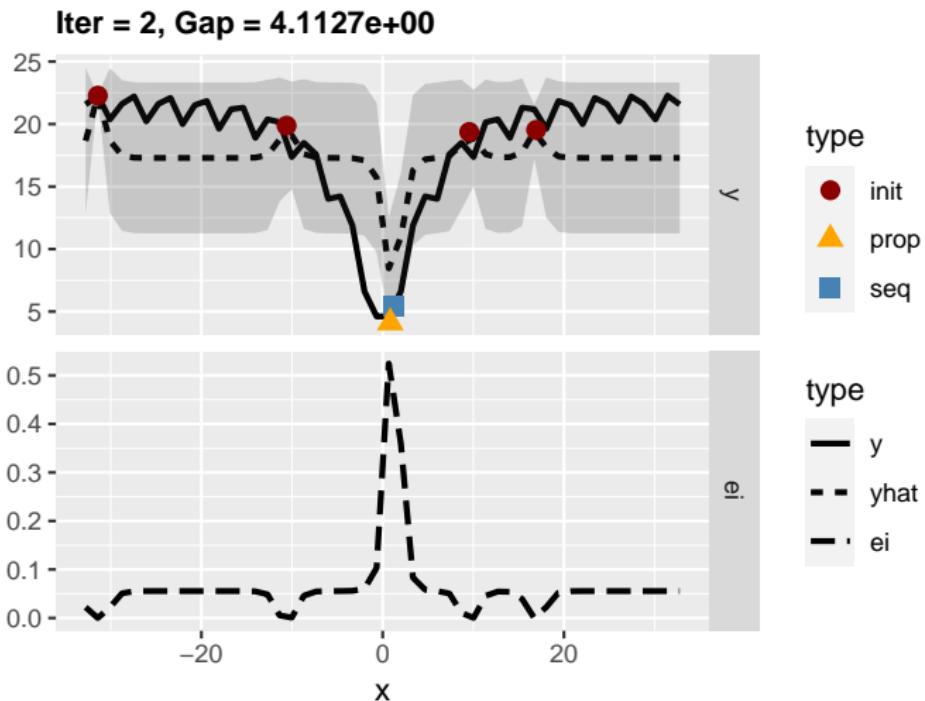

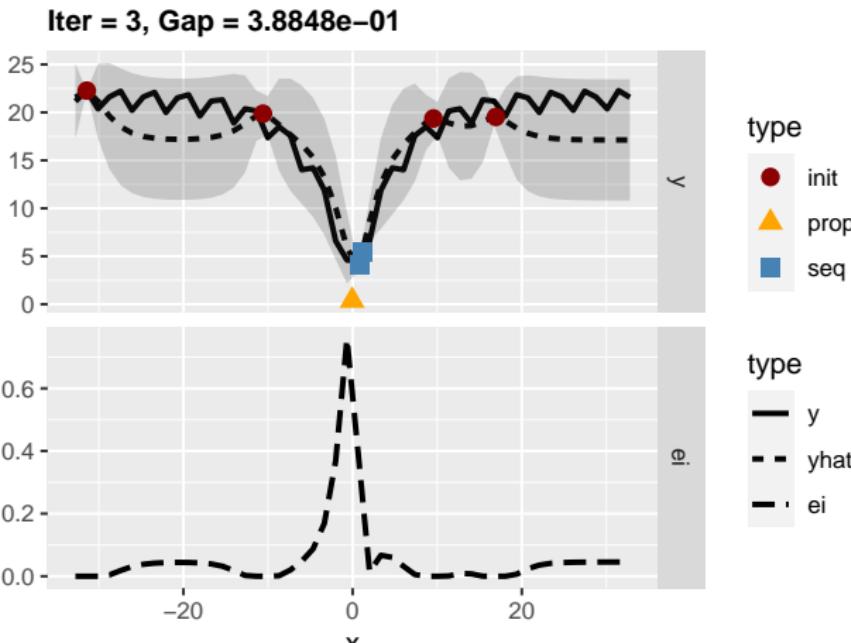


Iteration 3

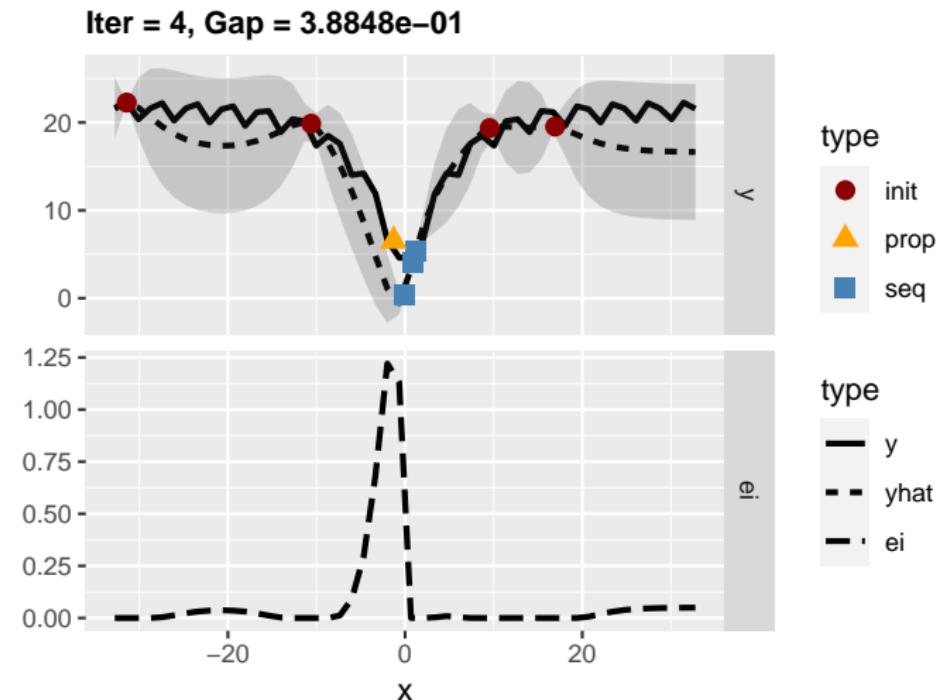




Iter = 5, Gap = 3.8848e-01

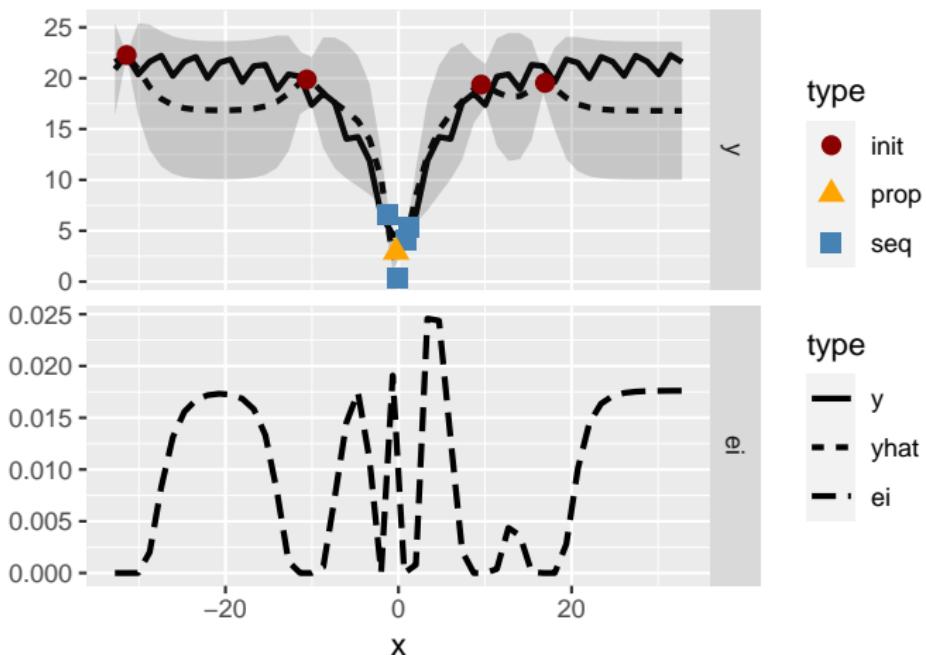

Iteration 5




Iter = 6, Gap = 3.8848e-01

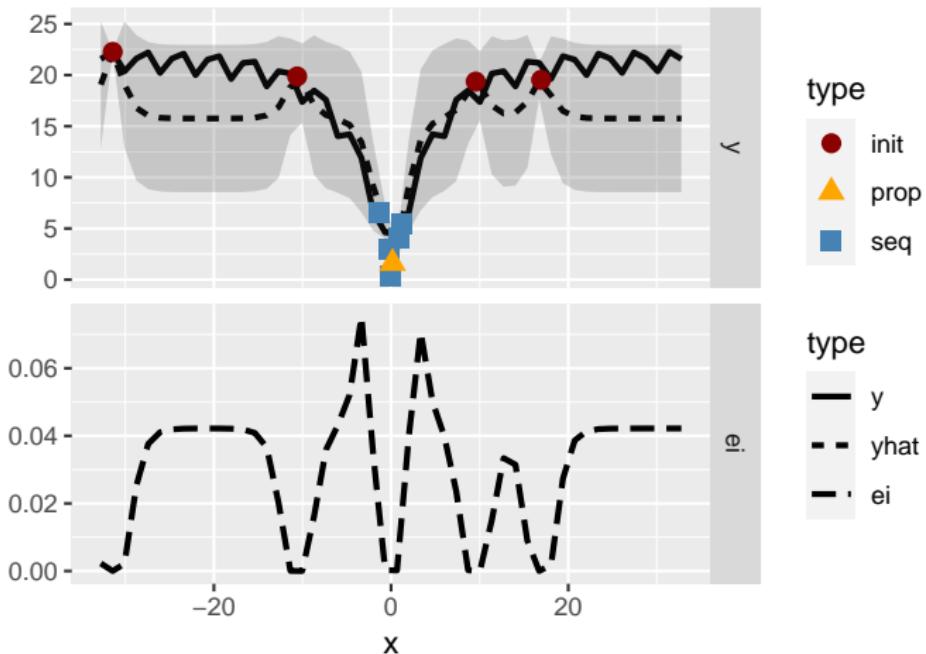

Iteration 6


Iter = 7, Gap = 3.8848e-01

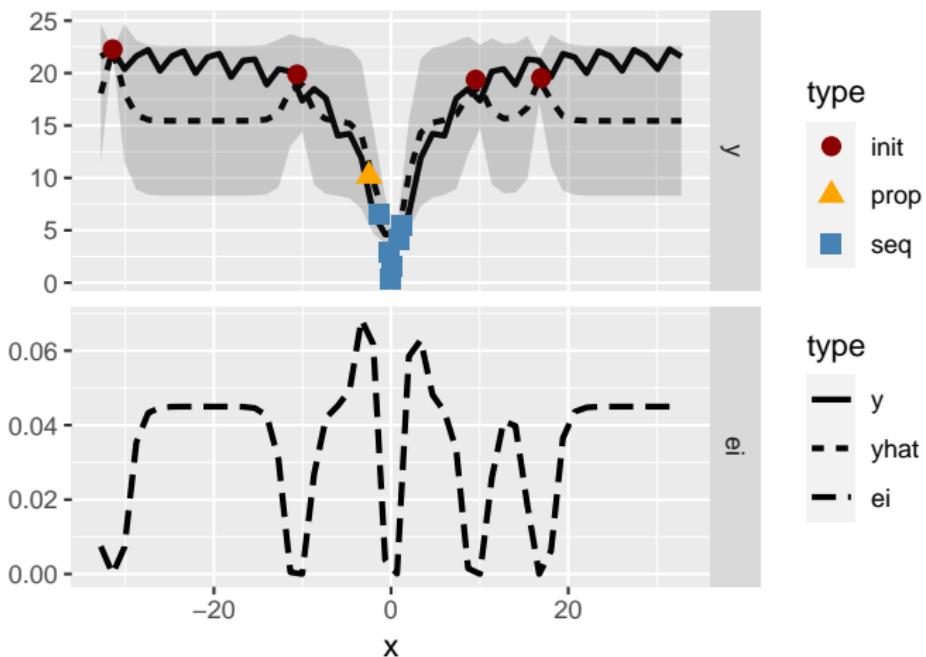


Iteration 7



Iter = 10, Gap = 4.8360e-02

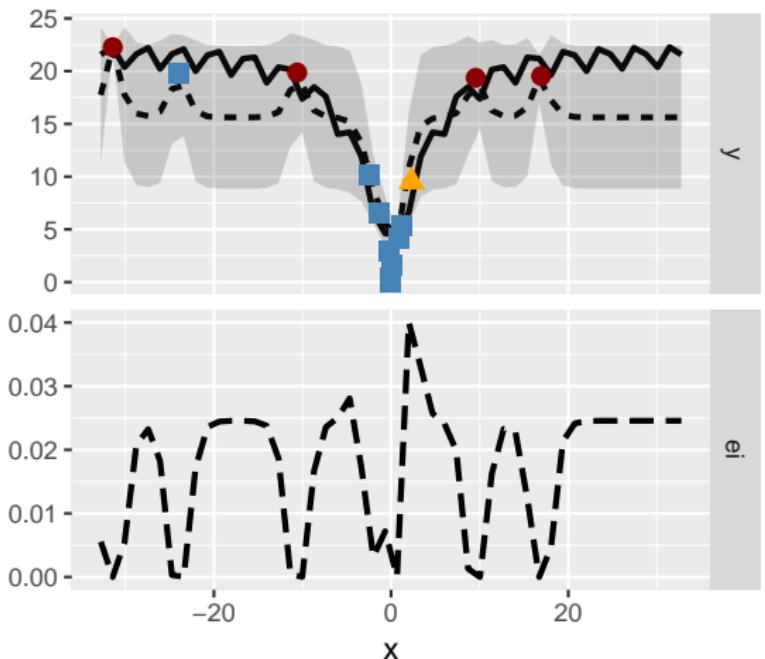


Iteration 10

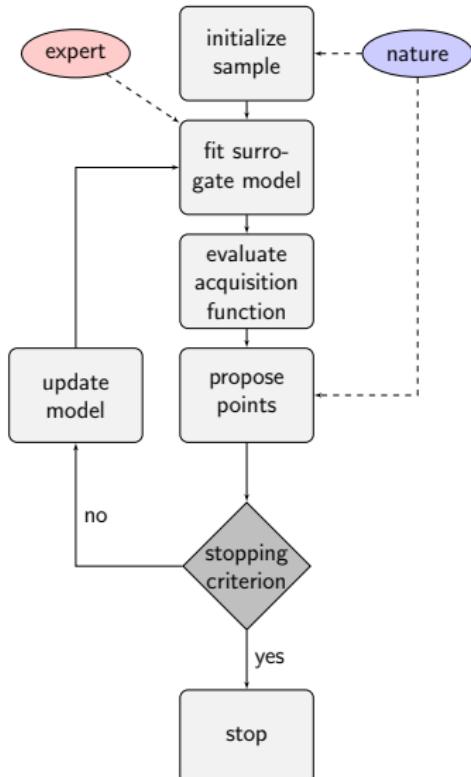




- 1 Bayesian Optimization
- 2 Gaussian Processes
- 3 Sensitivity Analysis
- 4 Prior-Mean-Robust BO (PROBO)
- 5 Application in Material Science
- 6 Discussion
- 7 References

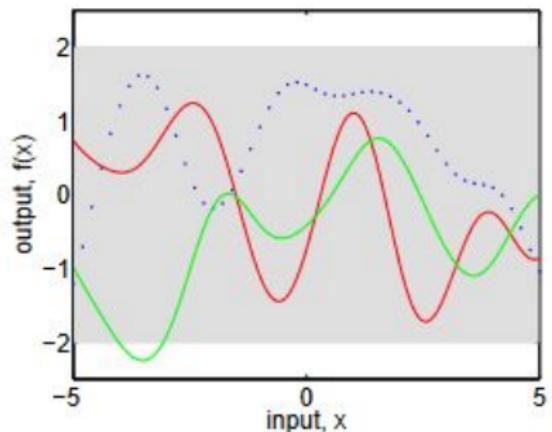


(a), prior

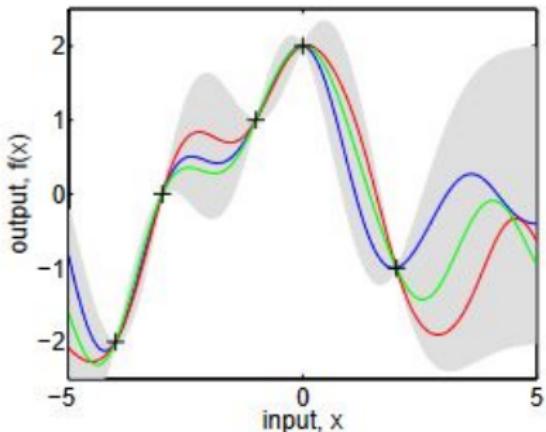


(b), posterior

Functional GP regression: Three functions drawn from prior (a) and posterior (b) GP. Image credits: [Rasmussen, 2003].

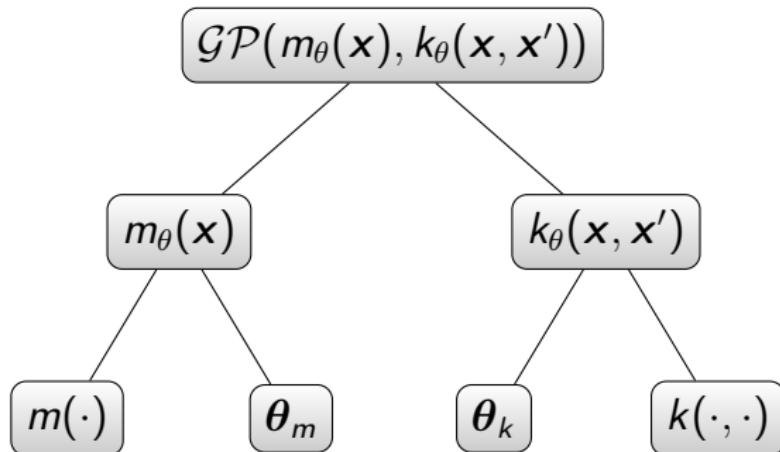

How to specify $m(\cdot)$, θ_m , θ_k and $k(\cdot, \cdot)$
in absence of prior knowledge?

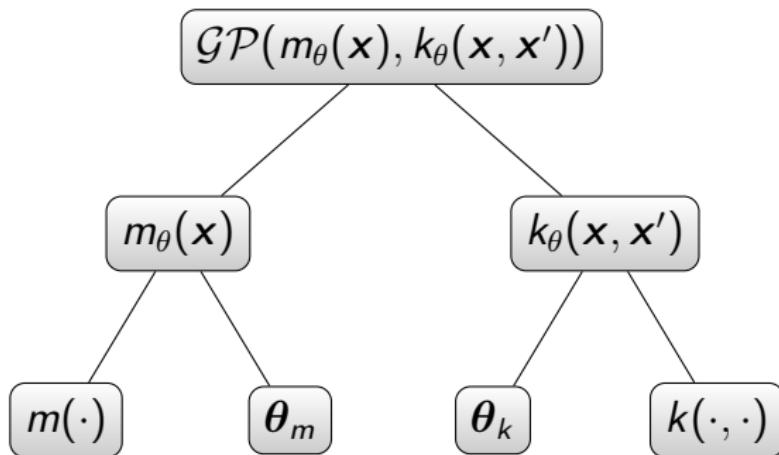

And: Do they even matter?



1 Bayesian Optimization

2 Gaussian Processes

3 Sensitivity Analysis

Setup

Results

4 Prior-Mean-Robust BO (PROBO)

5 Application in Material Science

6 Discussion

7 References



1 Bayesian Optimization

2 Gaussian Processes

3 Sensitivity Analysis

Setup

Results

4 Prior-Mean-Robust BO (PROBO)

5 Application in Material Science

6 Discussion

7 References



- We randomly select 50 synthetic test functions from the R package `smoof` [Bossek, 2017], stratified across the covariate space dimensions 1, 2, 3, 4 and 7.
- For each of them, a sensitivity analysis is conducted with regard to each of the four prior components.
 - 5 functional forms
 - 5 mean and kernel parameter specifications (relative deviation from global mean)
 - we control for interaction effects
- The initial design of size $n_{init} = 10$ is randomly sampled anew for each of the $R = 40$ BO repetitions with $T = 20$ iterations each.



1 Bayesian Optimization

2 Gaussian Processes

3 Sensitivity Analysis

Setup

Results

4 Prior-Mean-Robust BO (PROBO)

5 Application in Material Science

6 Discussion

7 References



- **Mean parameters** influence convergence the most, followed by the **kernel's functional form**.
- **Mean functional form** and **Kernel parameters** play a (relatively) negligible role.



- 1 Bayesian Optimization
- 2 Gaussian Processes
- 3 Sensitivity Analysis
- 4 Prior-Mean-Robust BO (PROBO)
Prior near-ignorance models
GLCB
- 5 Application in Material Science
- 6 Discussion
- 7 References



- 1 Bayesian Optimization
- 2 Gaussian Processes
- 3 Sensitivity Analysis
- 4 Prior-Mean-Robust BO (PROBO)
Prior near-ignorance models
GLCB
- 5 Application in Material Science
- 6 Discussion
- 7 References



- Idea: Use set of θ_m instead of precise θ_m . Fully specify the other components.
- [Mangili, 2015] proposes imprecise Gaussian processes

$$\left\{ \mathcal{GP} \left(Mh, k_{\theta}(x, x') + \frac{1+M}{c} \right) : h = \pm 1, M \geq 0 \right\},$$

given a base kernel $k_{\theta}(x, x')$ and a degree of imprecision $c > 0$.


→ results in a set of posteriors whose upper and lower mean estimates $\underline{\hat{\mu}}(x)_c$, $\bar{\hat{\mu}}(x)_c$ can be derived




- 1 Bayesian Optimization
- 2 Gaussian Processes
- 3 Sensitivity Analysis
- 4 Prior-Mean-Robust BO (PROBO)
Prior near-ignorance models
GLCB
- 5 Application in Material Science
- 6 Discussion
- 7 References



- $LCB(x) = -\hat{\mu}(x) + \tau \cdot \underbrace{\sqrt{\widehat{\text{Var}}(\mu(x))}}_{\text{"classical" uncertainty}}$
 - $GLCB(x) = -\hat{\mu}(x) + \tau \cdot \underbrace{\sqrt{\widehat{\text{Var}}(\mu(x))}}_{\text{"classical" uncertainty}} + \rho \cdot \underbrace{(\bar{\mu}(x)_c - \underline{\mu}(x)_c)}_{\text{prior-induced imprecision}}$
- τ is the degree of risk-aversion
 - ρ is the degree of ambiguity-aversion

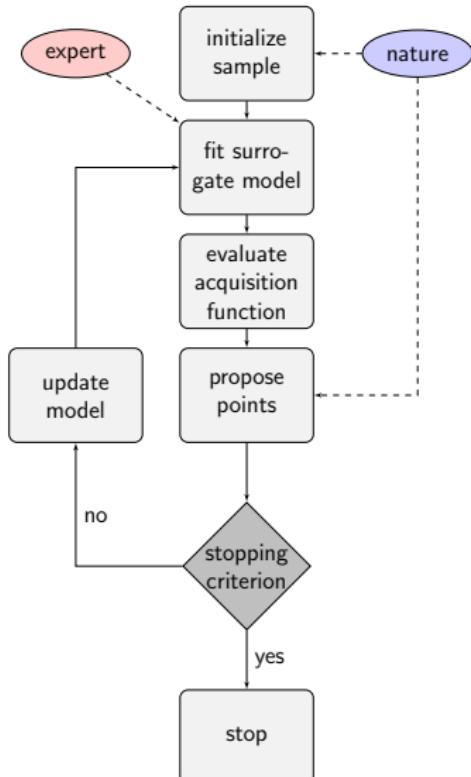

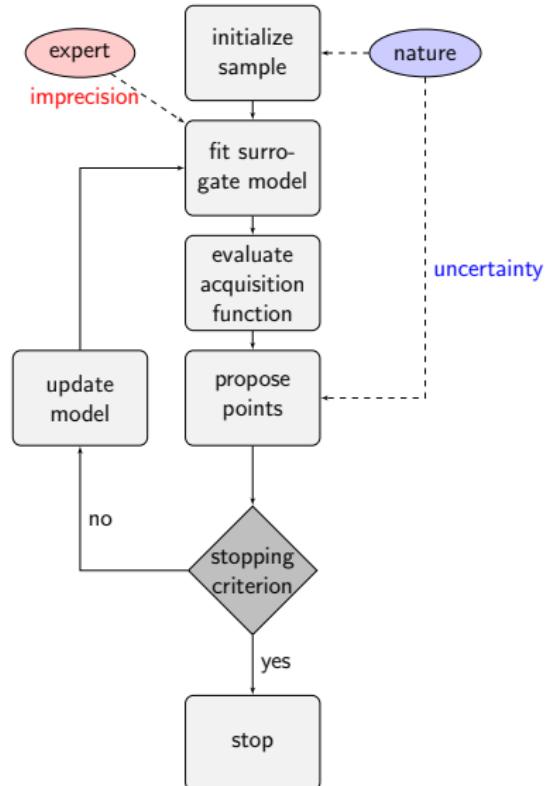



Notably, $\bar{\hat{\mu}}(x) - \underline{\hat{\mu}}(x)$ simplifies to an expression only dependent on predictive kernels $\mathbf{k}_x = [k_\theta(x, x_1), \dots, k_\theta(x, x_n)]^T$, the base kernel matrix \mathbf{K}_n (from training) and the degree of imprecision c . For some¹ values of c (depending on observations):

$$\bar{\hat{\mu}}(x) - \underline{\hat{\mu}}(x) = (1 - \mathbf{k}_x^T \mathbf{s}_k) \left(\frac{\mathbf{s}_k^T \mathbf{y}}{\mathbf{S}_k} + \frac{c}{\mathbf{S}_k} - \frac{\mathbf{s}_k^T \mathbf{y}}{c + \mathbf{S}_k} \right) \quad (1)$$

¹For a thorough case distinction, please refer to the Appendix.




For sufficiently high c , the model imprecision $\bar{\hat{\mu}}(x) - \underline{\hat{\mu}}(x)$ even simplifies further:

$$\bar{\hat{\mu}}(x) - \underline{\hat{\mu}}(x) = 2c \frac{|1 - \mathbf{k}_x^T \mathbf{s}_k|}{\mathbf{s}_k} \quad (2)$$


In this case, GLCB's hyperparameters ρ and c collapse to one.



- 1 Bayesian Optimization
- 2 Gaussian Processes
- 3 Sensitivity Analysis
- 4 Prior-Mean-Robust BO (PROBO)
- 5 Application in Material Science
- 6 Discussion
- 7 References

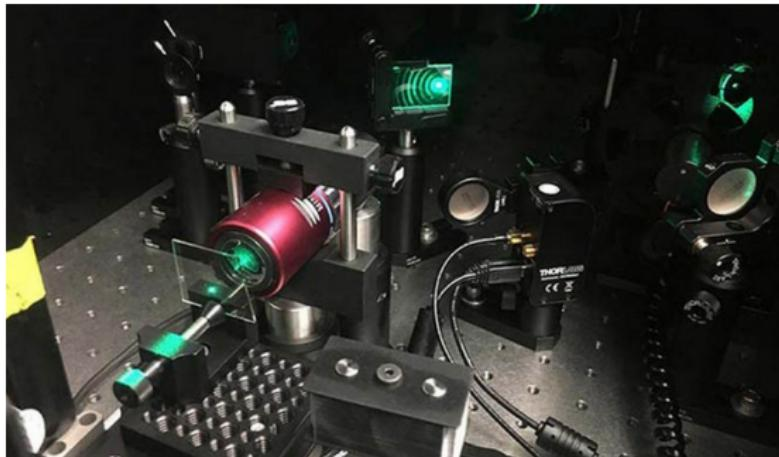

Experimental set-up of graphene production: "The preparation of a sample to be irradiated requires about **one week**." [Kotthoff, 2019]

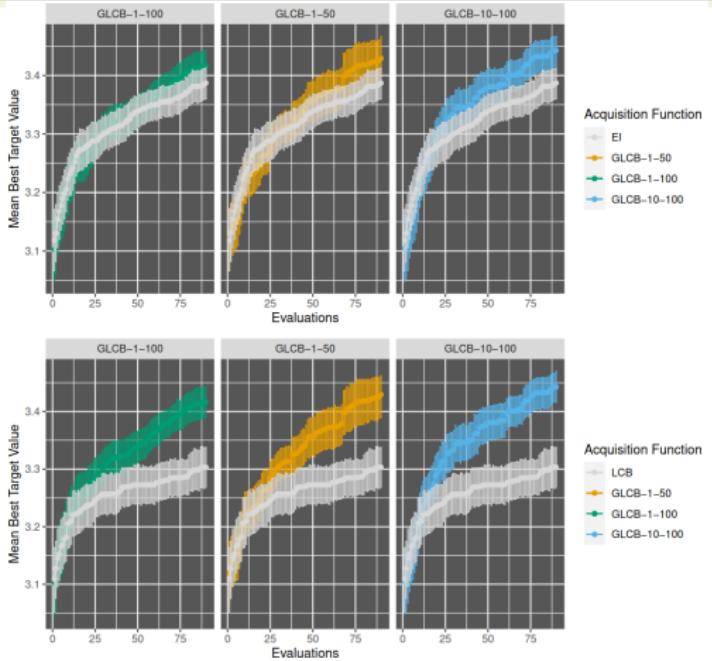

BO with GLCB on Graphene function. GLCB-1-50 means GLCB with $\rho = 1$, $c = 50$. Data source: [Wahab et al., 2020].



- 1 Bayesian Optimization
- 2 Gaussian Processes
- 3 Sensitivity Analysis
- 4 Prior-Mean-Robust BO (PROBO)
- 5 Application in Material Science
- 6 Discussion
- 7 References



- Limitations
 - robust only with regard to possible misspecification of the mean function parameter given a constant trend
 - how to specify c ?
- Venues for future work
 - locally
 - multivariate extensions
 - Can we ensure $|\frac{s_k \mathbf{y}}{s_k}| \leq 1 + \frac{c}{s_k}$ such that hyperparameters c and ρ collapse to one?
 - globally
 - Imprecise probabilities offer vivid framework to represent ignorance in surrogate-assisted derivative-free optimization



- Thanks a lot for your attention!
- Feel free to try out PROBO yourself:
<https://github.com/rodemann/gp-imprecision-in-bo>
- We are looking forward to your feedback and comments of any kind!



- Rodemann, J.: *Robust Generalizations of Stochastic Derivative-Free Optimization*. Master's thesis, LMU Munich (2021)¹
- Rodemann, J., Augustin, T.: *Accounting for Gaussian Process Imprecision in Bayesian Optimization*. In: Honda, K., Entani, T., Ubukata, S., Huynh, V.N., Inuiguchi, M. (eds.) IUKM. Springer Lecture Notes in Computer Science (LNCS). pp. 92–104. Springer, Cham (2022)

¹https://epub.ub.uni-muenchen.de/77441/1/MA_Rodemann.pdf



- 1 Bayesian Optimization
- 2 Gaussian Processes
- 3 Sensitivity Analysis
- 4 Prior-Mean-Robust BO (PROBO)
- 5 Application in Material Science
- 6 Discussion
- 7 References



-  Benavoli, A. and Zaffalon, M. (2015).
Prior near ignorance for inferences in the k-parameter exponential family.
Statistics, 49(5):1104–1140.
-  Bischl, B., Richter, J., Bossek, J., Horn, D., Thomas, J., and Lang, M. (2017).
mlrmbbo: A modular framework for model-based optimization of expensive black-box functions.
arXiv preprint arXiv:1703.03373.
-  Bossek, J. (2017).
smoof: Single- and multi-objective optimization test functions.
The R Journal.



-  Kotthoff, L. (2019).
Ai for materials science: Tuning laser-induced graphene production and beyond.
-  Mangili, F. (2015).
A prior near-ignorance Gaussian process model for nonparametric regression.
In *ISIPTA '15: Proceedings of the 9th International Symposium on Imprecise Probability: Theories and Applications*, pages 187–196.
-  Rasmussen, C. E. (2003).
Gaussian processes in machine learning.
In *Summer school on machine learning*, pages 63–71. Springer.



-  Wahab, H., Jain, V., Tyrrell, A. S., Seas, M. A., Kotthoff, L., and Johnson, P. A. (2020).
Machine-learning-assisted fabrication: Bayesian optimization of laser-induced graphene patterning using in-situ raman analysis.
Carbon, 167:609–619.
-  Wickham, H. (2016).
ggplot2: Elegant Graphics for Data Analysis.
Springer-Verlag New York.